

globe valves

# Globe valve actuator with emergency control function for 2-way and 3-way Actuating force 2000 N Nominal voltage AC 230 V

- Control 3-point
- Nominal stroke 32 mm
- · Design life SuperCaps: 15 years



## **Technical data**

| Electrical data | Nominal voltage                                   | AC 230 V  |
|-----------------|---|---|
|                 | Nominal voltage frequency                         | 50/60 Hz  |
|                 | Nominal voltage range                             | AC 85265 V  |
|                 | Power consumption in operation                    | 3.5 W   |
|                 | Power consumption in rest position                | 1.5 W   |
|                 | Power consumption for wire sizing                 | 6.5 VA  |
|                 | Connection supply / control                       | Cable 1 m, 4 x 0.75 mm <sup>2</sup>   |
|                 | Parallel operation                                | Yes (note the performance data)   |
| Functional data | Actuating force                                   | 2000 N  |
|                 | Setting emergency position (POP)                  | Actuator spindle retracted / extended,  |
|                 |   | adjustable (POP rotary button)  |
|                 | Manual override                                   | Gear disengagement with push-button   |
|                 | Nominal stroke                                    | 32 mm   |
|                 | Actuating time                                    | 150 s / 32 mm   |
|                 | Actuating time emergency control<br>function      | 35 s / 32 mm  |
|                 | Sound power level motor max.                      | 60 dB(A)  |
|                 | Sound power level emergency setting position max. | 60 dB(A)  |
|                 | Position indication                               | Mechanically, 532 mm stroke   |
| Safety          | Protection class IEC/EN                           | II Protective insulated   |
|                 | Degree of protection IEC/EN                       | IP54  |
|                 | EMC   | CE according to 2004/108/EC   |
|                 | Low voltage directive                             | CE according to 2006/95/EC  |
|                 | Certification IEC/EN                              | IEC/EN 60730-1 and IEC/EN 60730-2-14  |
|                 | Mode of operation                                 | Type 1.AA   |
|                 | Rated impulse voltage supply / control            | 4 kV  |
|                 | Control pollution degree                          | 3   |
|                 | Ambient temperature                               | 050°C   |
|                 | Non-operating temperature                         | -4080°C   |
|                 | Ambient humidity                                  | 95% r.h., non-condensing  |
|                 | Maintenance                                       | Maintenance-free  |
| Weight          | Weight approx.                                    | 4.4 kg  |
| Terms           | Abbreviations                                     | POP = Power off position / emergency setting<br>position<br>CPO = Controlled power off / controlled<br>emergency control function<br>PF = Power fail delay time / bridging time |

#### Safety notes



• This device has been designed for use in stationary heating, ventilation and air conditioning systems and is not allowed to be used outside the specified field of application, especially in aircraft or in any other airborne means of transport.

Only authorised specialists may carry out installation. All applicable legal or • institutional installation regulations must be complied during installation.



| • • • •  |   |  |  |
|--|---|--|--|
| Safety notes   |   |  |  |
|  | <ul> <li>The switch for changing the direction of motion and so the closing point may be adjusted only by authorised specialists. The direction of motion is critical, particularly in connection with frost protection circuits.</li> <li>The device may only be opened at the manufacturer's site. It does not contain any parts that can be replaced or repaired by the user.</li> <li>The cables must not be removed from the device.</li> <li>The device contains electrical and electronic components and is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.</li> </ul> |  |  |
| Product features   |   |  |  |
| Mode of operation  | The actuator moves the valve to the desired operating position at the same time as the integrated capacitors are loaded.<br>Interrupting the supply voltage causes the valve to be moved to the selected emergency setting position (POP) by means of stored electrical energy.   |  |  |
| Pre-charging time (start up)   | The capacitor actuators require a pre-charging time. This time is used for charging the capacitors up to a usable voltage level. This ensures that, in the event of an electricity interruption, the actuator can move at any time from its current position into the preset emergency setting position (POP). The duration of the pre-charging time depends mainly on how long the power was interrupted.  |  |  |
|  | Typical pre-charging time   |  |  |
|  | 30<br>[s] 30<br>[s]   |  |  |
|  |   |  |  |
|  |   |  |  |
|  | 20 20   |  |  |
|  | 15 15   |  |  |
|  |   |  |  |
|  | 10 10   |  |  |
|  | 5 5 5   |  |  |
|  | 5   |  |  |
|  |   |  |  |
|  | 0 2 4 6 8 10 [d] 12   |  |  |
|  | [d]<br>0   1   2   7  ≥10   |  |  |
| [d] = Electricity interruption in days                                       | [s] 6 9 11 16 20  |  |  |
| [s] = Pre-charging time in seconds<br><b>Delivery condition (capacitors)</b> | The actuator is completely discharged after delivery from the factory, which is why the actuator requires approximately 20 s pre-charging time before initial commissioning in order to bring the capacitors up to the required voltage level.  |  |  |
| Direct mounting  | Simple direct mounting on the globe valve by means of form-fit hollow clamping jaws.<br>The actuator can be rotated by 360° on the valve neck.  |  |  |
| Manual override  | <ul> <li>Manual control with push-button possible - temporary. The gear is disengaged and the actuator decoupled for as long as the button is pressed.</li> <li>The stroke can be adjusted by using a hexagon socket screw key (5 mm), which is inserted into the top of the actuator. The stroke spindle extends when the key is rotated clockwise.</li> </ul>   |  |  |
| High functional reliability  | The actuator is overload protected, requires no limit switches and automatically stops when the end stop is reached.  |  |  |
| Combination valve/actuator   | Refer to the valve documentation for suitable valves, their permitted medium temperatures and closing pressures.  |  |  |
| Position indication  |   |  |  |



| Product features   |  |   |
|--|--|---|
| Home position Factory setting: Actuator spindle is retracted.<br>When valve-actuator combinations are shipped, the direction of motion is set accordance with the closing point of the valve.  |  | e direction of motion is set in                               |
| Direction of stroke switch   | When actuated, the direction of stroke switch changes the running direction in normal operation. The direction of stroke switch has no influence on the emergency setting position (POP) which has been set. |   |
| Rotary knob emergency setting<br>position<br>position<br>The «Emergency setting position» rotary knob can be used to adjust the desire<br>emergency setting position (POP). The POP range is in reference to the maxim<br>height of stroke of the actuator.<br>In the event of an electricity interruption, the actuator will move into the selecte<br>emergency setting position, taking into account the bridging time (PF) of 2 s wh<br>set ex-works. |  | is in reference to the maximum or will move into the selected |
| Accessories  |  |   |
|  | Description  | Туре  |
| Electrical accessories   | Auxiliary switch, 2 x SPDT, add-on   | S2A-H   |
| Electrical installation  |  |   |

| Notes | <ul> <li>Caution: Power supply voltage!</li> <li>Parallel connection of other actuators possible. Observe the performance data.</li> <li>Direction of stroke switch factory setting: Actuator spindle retracted.</li> </ul> |
|-------|---|
|-------|---|


## Wiring diagrams

- **Cable colours:** 1 = blue 2 = brown
  - 3 = white
  - 4 = white

www.belimo.eu



## **Operating controls and indicators**

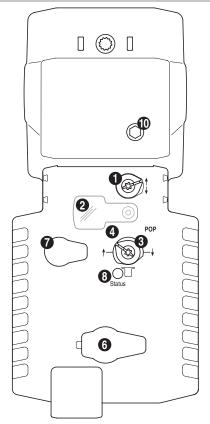

#### (1) Direction of stroke switch

Switch over: Direction of stroke changes

(2) Cover, POP button

- (3) POP button
- (4) Scale for manual adjustment
- (6) No function

(7) Gear disengagement button, temporary

Press button: Gear disengages, motor stops, manual override possible Release button: Gear engages, standard mode

#### (8) LED display green


Off: Not in operation, pre-charging time SuperCap or fault SuperCap On: Operation OK

Flashing: POP function active

#### (10) Manual override

Clockwise: Actuator spindle extends Counterclockwise: Actuator spindle retracts


#### Setting the POP power of position

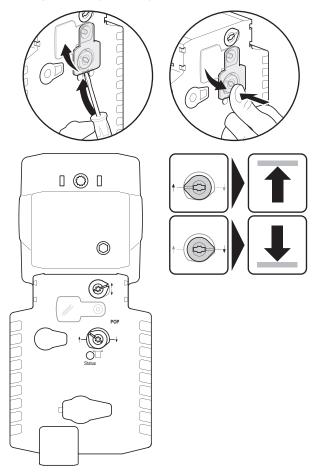



## **Dimensions** [mm]

## **Dimensional drawings**

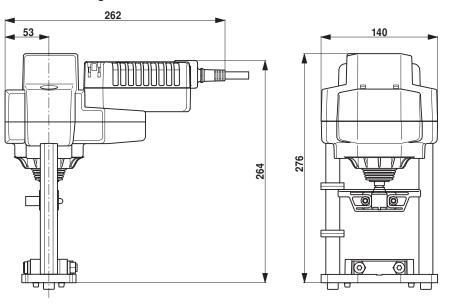

## **Further documentation**

- Overview Valve-actuator combinations
- . Data sheets for globe valves
- Installation instructions for actuators and/or globe valves Notes for project planning 2-way and 3-way globe •
- .
- General notes for project planning